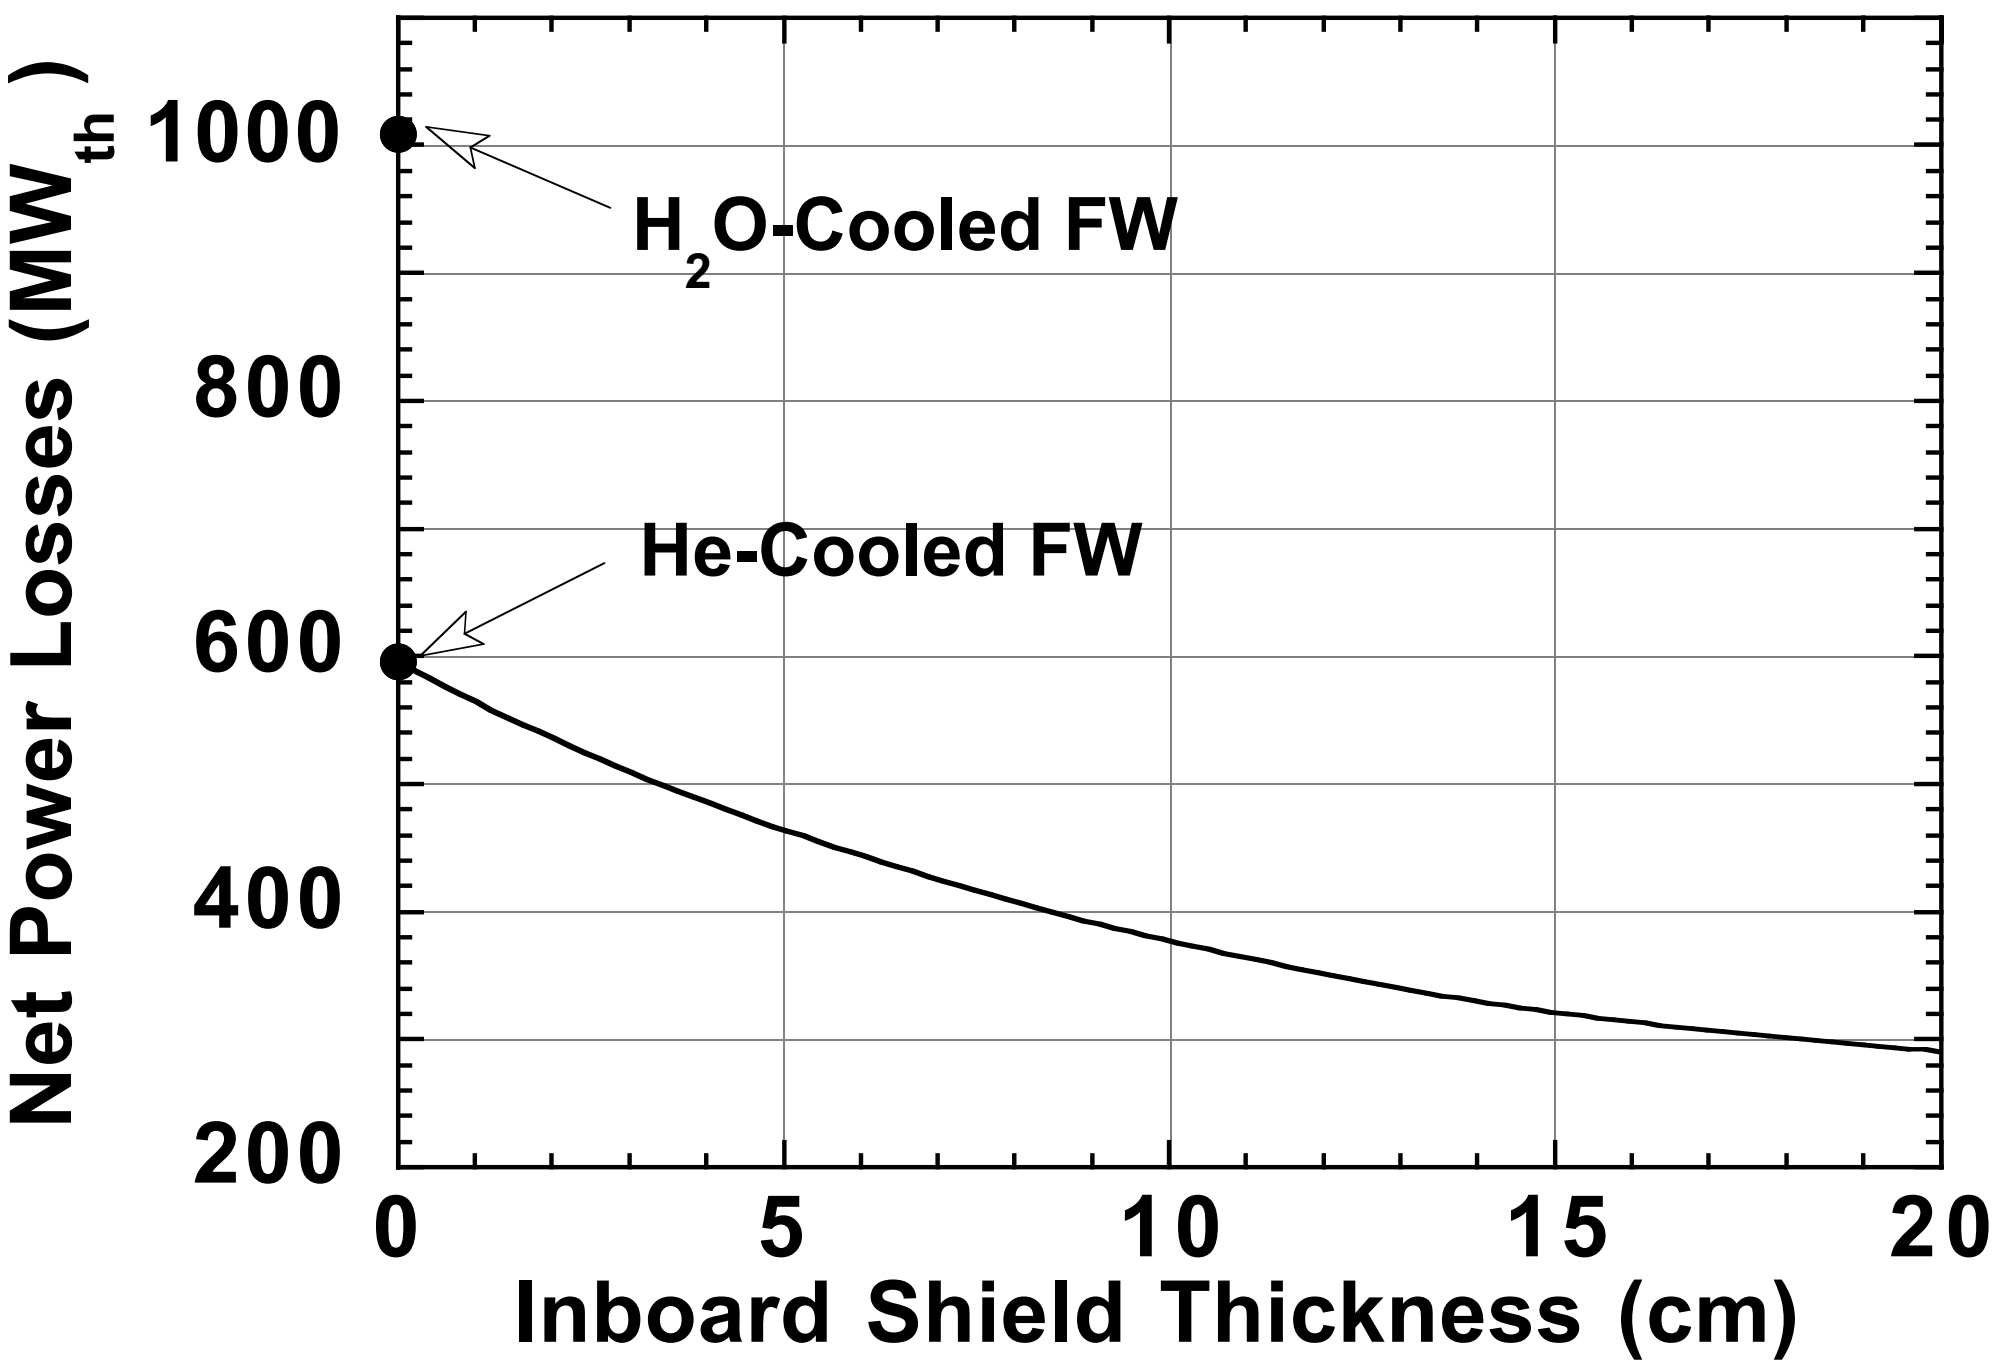
Net Power Losses (MW_{th})
1000
800
600
400
200
H_2O-Cooled FW
He-Cooled FW
0
5
10
15
20
Inboard Shield Thickness (cm)