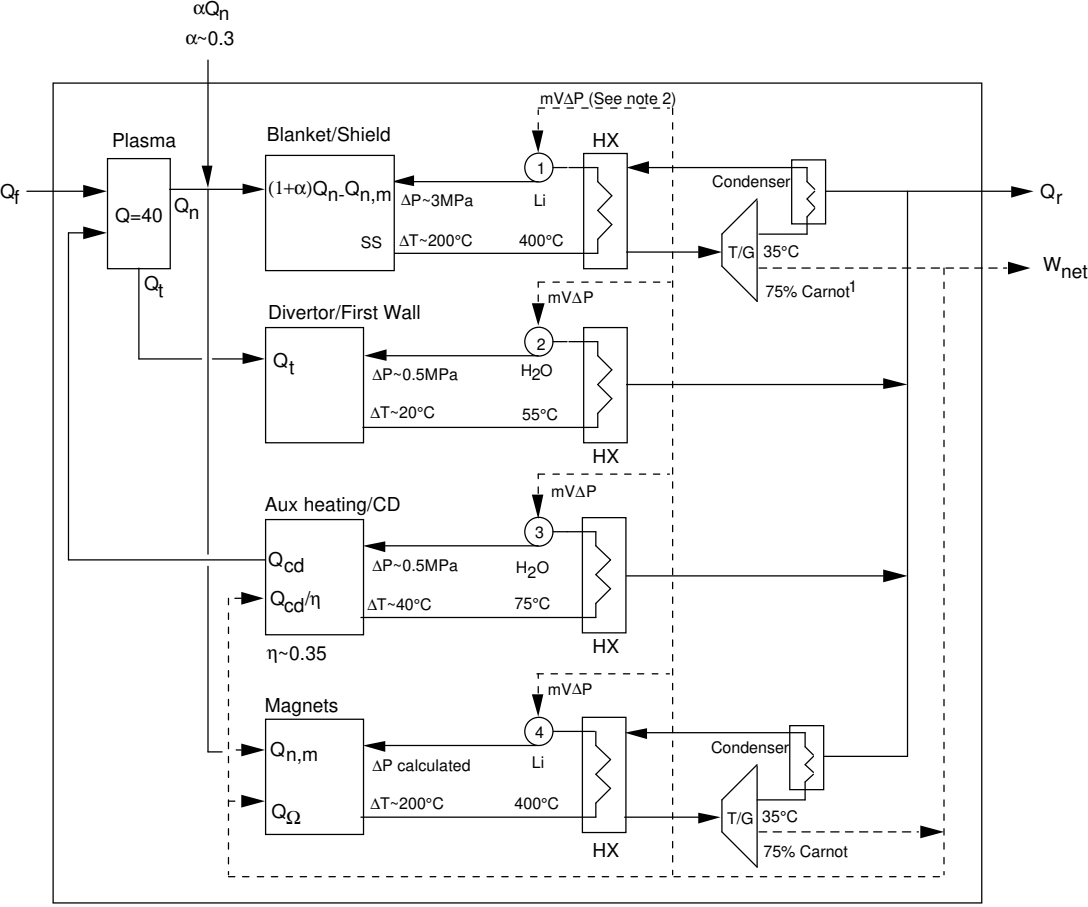

Li-COOLED MAGNET OPTION

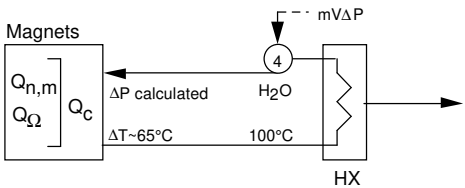

WATER-COOLED MAGNET OPTION

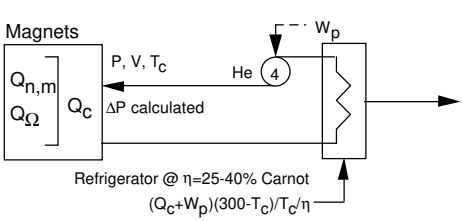

CRYO-COOLED MAGNET OPTION

[1] All power conversion cycles are assumed to operate at 75% of the Carnot efficiency, i.e. $W/Q_a = 0.75(T_a - T_r)/T_a$

[2] All pumps are assumed to be 75% efficient